
Red LED Strip Installation Instruction

Remove 4 fasteners and trunk end trim in the direction of the arrow shown in the figure.



Remove one fastener and partially peel back the trunk side trim

Insert rear harness between the two 6 pin connectors for the rear combination light short-cord

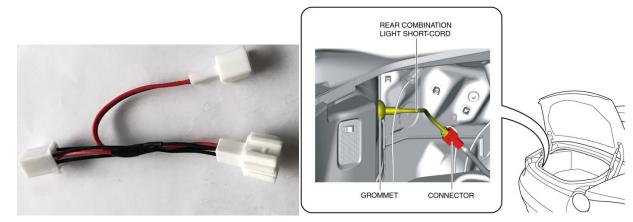

Prepare surface for the LED strip by wiping it with the alcohol pad and 3M primer (included) Remove red protection tape from back side of the LED strip

Attach LED strip to the trunk lid, applying pressure evenly along the strip.

Unplug rubber/plastic caps from the trunk lid.

Route the cable through the two openings in the trunk lid



Connect the 2 pin connector from the cable to the harness.

Using a sharp x-acto knife make a slit from the center of the caps to the edge of caps.



Insert the cable through the slit on the caps and install all the caps back in place.

Turn parking light on to check the light.

